
PressureGuard[®] Protocol[®]

Microclimate Management with Alternating Pressure Therapy

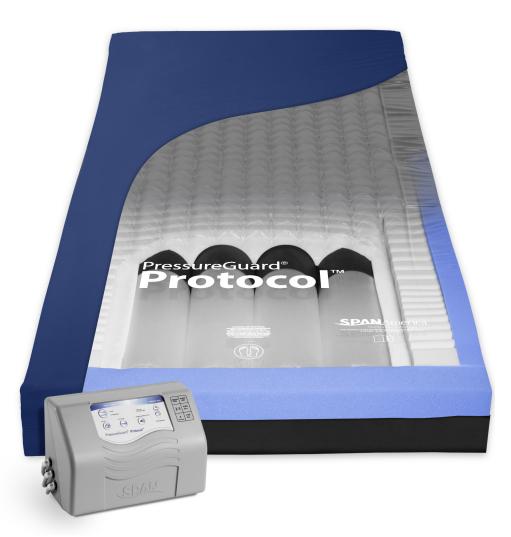

Effective.

Proven active pressure redistribution and microclimate management.

Efficient.

Patented "Air Diffusion Matrix™" design generates less noise, uses less power.

Exceptional.

Unmatched combination of air therapy, safety, stability, comfort and ease of use.



SURFACES BEDS BEDS SEATING SEATING FALL PROTECTIO POSITIONERS SKIN CARE

PressureGuard[®] Protocol[®]

Delivering High Value, High Performance in Microclimate Management.

Our newest air therapy system brings together two time-tested design exclusives:

THERAPY MODE

PressureGuard[®] Protocol[™]

COCO FLOAT

 (\mathbf{l})

• **Proprietary "Air Diffusion Matrix"** offers direct delivery microclimate management ("low air loss") for control of excess moisture.

+

• Clinically proven PressureGuard[®] integrated air system/engineered foam shell design for an ideal combination of immersion, envelopment, shearing reduction, active air therapy, fall prevention, comfort, stability, fast set-up and ease of cleaning.



- **Right angled, swivel connectors** and flexible air lines.
- Molded-in handle for easy transport.
- Heavy-duty mounting hooks.

 Flush-mounted, detachable power cord can be replaced if damaged.


AIR FLOW

Span Exclusive: Patented* microclimate management design protects vulnerable skin by supplying a gentle, uninterrupted flow of air to help eliminate excess moisture.

Outer coverlet

- vapor-permeable, yet fluid-proof
 Air Diffusion Matrix[™] layer outperforms typical batting
- wipes clean in place with standard hospital-grade cleaners
- machine launderable

*U.S. Patent numbers 6,782,574 and 7,296,315



Inner air delivery cover

- dedicated air supply
 continuous airflow through Air Diffusion Matrix[™] layer
- sweeps away moisture vapor before it can re-form as a liquid
- reduces maceration, especially effective at the sacrum

The PressureGuard Advantage:

Safety Edge™ design

Ensures safer transfers, minimizes

risk of falls and entrapment.



Geo-Matt® segmentation Provides tissue-friendly, non-shearing top surface.

Raised Perimeter models add an extra measure of safety by helping to prompt the user away from edge of bed.



Protective Heel Slope™ Redistributes pressure away from vulnerable heels.

Efficient system design generates substantially less noise and consumes less than half the power of many traditional, blower-based "roll-up" surfaces.

- Alternating pressure mode gently changes loading across the surface in a 10-minute cycle.
- **"Float " mode** provides powered flotation therapy.
- Simple comfort adjustment, including ultra-soft "Max. Immersion" setting for users under 120 lbs.
- Selectable audible alarm and indicator light for low pressure notification.
- Timed (30-minute) "Auto Firm" function for added stability during transfers, ADLs & CPR.
- Can maintain inflation during power interruption and transport.

| Item # Description All models include mattress, coverlet and control unit | |
|--|---|
| P7535-29 P8035-29 P8435-29 23173 17108 69212 33905 72235 81990 3400 | Protocol, 75″L x 35″W x 7″H Protocol, 80″L x 35″W x 7″H Protocol, 84″L x 35″W x 7″H Protocol, 84″L x 42″W x 7″H Protocol, 84″L x 42″W x 7″H Protocol with raised perimeter, 84″L x 35″W x 7″H (9″H side) Protocol with raised perimeter, 84″L x 42″W x 7″H (9″H side) Protocol with raised perimeter, 84″L x 42″W x 7″H (9″H side) Protocol with raised perimeter, 84″L x 42″W x 7″H (9″H side) |
| Control unit: | Weight: 11.5 lbs. Dimensions: 14" x 9.25" x 6.5" Voltage: AC 110-120V Frequency: 60 Hertz Certification: CAN/CSA-C22.2 No.60601-1:2005 |
| Flammability: | Conforms to NFPA 101 (Life Safety Code) / ASTM E1590; Cal Tech Bulletin #117 (2013); 16 CFR Parts 1632 and 1633. |
| Indications: | Excessive perspiration or maceration; treatment of Stage I-IV pressure ulcers; prevention for high risk patients. |
| Medicare Coding | : Meets requirements of E0277 (Group II) |
| Weight limit: | 400 lbs. (500 lbs. at 42") |
| Mattress weight: | : approx. 22 lbs. (28 lbs. at 42") |
| Warranty: | 18 months non-prorated |

PGP-01 © 2014 Span-America Medical Systems, Inc. • PO Box 5231 Greenville, SC 29606 800-888-6752 • www.spanamerica.com

better science. better care.

S PANAmerica